



# BarrelSys P FL

Technology For The Barrel

Integrated Barrel Fluid Handling Solution

**OEMSYS**  
smart  
system  
solutions

Whatever type of barrel you use for ingredients in your process, BarrelSys adds value to your operation with:

- ✓ Chemical compatibility
- ✓ Tightness
- ✓ Low Level sensing
- ✓ Liquid transportation
- ✓ Custom design
- ✓ Reliability
- ✓ Professional appearance



*„...BarrelSys handles your fluid in a proper way, keeps an eye on low level and is very cost effective...”*



**SPECIFIC**

Designed for you



**MEASURABLE**

Impacts your business



**ACHIEVABLE**

From idea to success



**RELEVANT**

Serves your application



**TIME-BOUND**

Built on time

IDEATION

DESIGNING


PROTOTYPING

TESTING

MANUFACTURING

**OEMSYS**  
smart  
system  
solutions

OEMSYS Sp. z o.o.  
Fabryczna 1  
34-600 Limanowa  
Poland

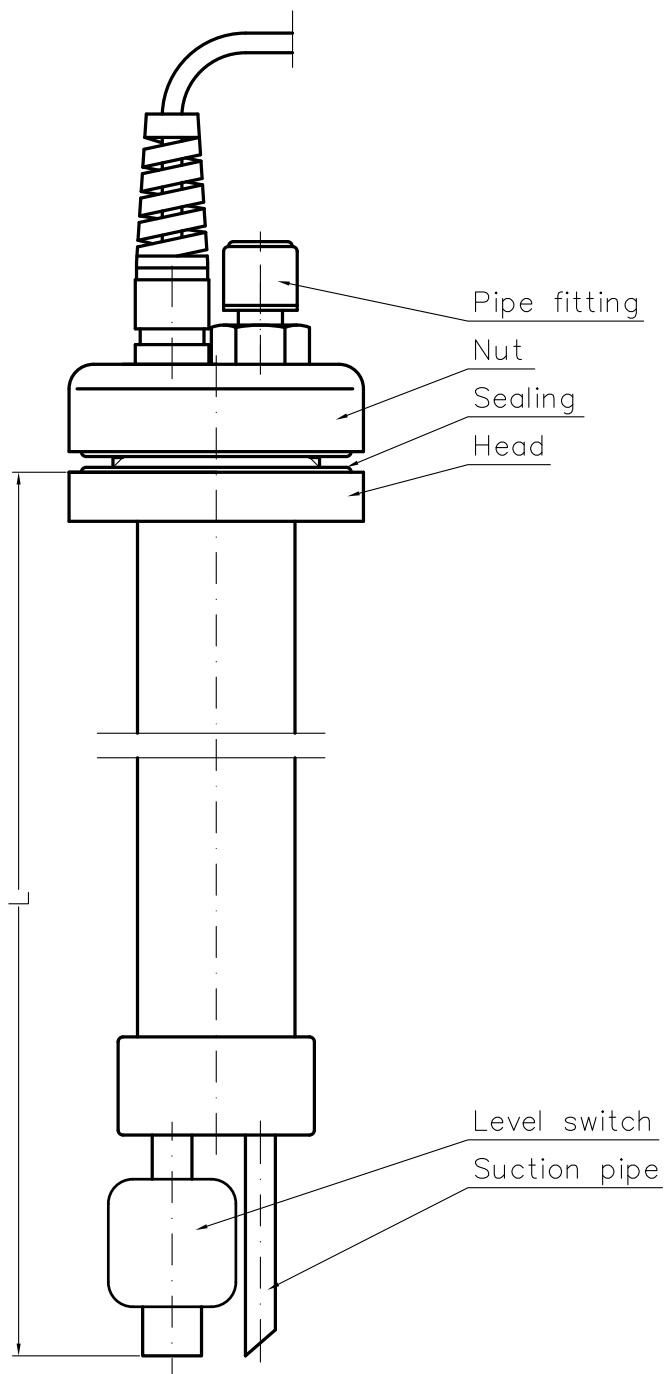

Technical specification	
Operating temperature	0..60°C
Switching power	10 W
Testing pressure	2 bar
Fluid minimum gravity	0,9
Mounting hole diameter	43 mm

BarrelSys P	- Length	- Cable length	- Wetted parts	- Sealing	- Pipe fitting	- Level logic
	[mm]	[mm]	P-PVCU/PP V-PVCU/PVDF S-Special	F-FKM E-EPDM S-Special	4/6 mm 5/8 mm 6/8 mm P6-Push-fit 6 mm P8-Push-fit 8 mm P10-Push-fit 10 mm S-Special	O-NO C-NC

Consult factory for more options. **S-Special:** Please provide more details.

\* NO/NC means output condition at NO LIQUID/Tank is empty